

**Expand Your Cutting Universe –**  
Get more of what you expect in **one** cut-off machine



- Largest cutting table in its class provides exceptional flexibility
- Unmatched user interface for time-saving operation
- Newest cutting technologies deliver fast, accurate cuts

# Expect More from Your Cutting Process

Discotom-100/-10 are versatile table top cut-off machines designed to give you a cost-efficient way to expand your cutting capabilities and streamline your cutting processes. Spacious, versatile and easy-to-use, Discotom-100/-10 deliver exceptional cutting flexibility and more cutting options so you can clamp and cut all types of workpieces efficiently, with less effort and minimum deformation.



**GREAT  
CUTTING SPACE**



## More Cutting Space

Discotom has the largest cutting table and cutting chamber in its class. Measuring 620 x 270 mm, the cutting table is almost twice the size of competing machines. Now you can clamp and cut all kinds of workpieces, including larger and more complex samples without having to make coarse sectioning on another machine.

## Greater Cutting Flexibility

Take on a wide variety of cutting tasks with one machine. Discotom is designed for maximum versatility and provides both automatic and manual cutting capabilities, and innovative cutting methods.

With Discotom, you can choose automatic direct cutting mode where the workpiece is moved against the cut-off wheel using constant feed speed. Or choose Impact Cutting when the cut-off wheel gets clogged by removed material.

For manual cutting, Discotom is equipped with Struers' popular ExciCut feature that makes it possible to section harder and larger workpieces in an efficient way.

A motorized locking system for the cutting arm ensures the cut-off wheel stays positioned correctly during automatic cutting, and makes the change between manual and automatic cutting easy and fast.

## 9 Features that Boost Cutting Productivity

- **VarioSpeed** (Discotom-100) - the cut-off wheel speed can be adjusted from 1.500 to 3.000 rpm to optimise for material hardness and application.
- **OptiFeed** - ensures the correct feed speed without compromising cut quality or wheel economy.
- **Axiowash** - automatic cleaning program to clean the inside of the machine.
- **ExciCut** - speeds up manual cutting of very hard materials.
- **Method database** - store up to 20 cutting methods for easy retrieval.
- **Cut-off wheel database** - All Struers' cut-off wheels are stored with recommended rotational speed and wheel thickness.
- **Intelligent speed adjustment** (Discotom-100) - ensures the correct speed for a given cut-off wheel in combination with the hardness of the material. The same wheel can be used for different materials without sacrificing the quality of the cut.
- **MultiCut** with automatic x-table\* - for serial cutting of slices.
- **Line laser\*** - enables precise alignment of the workpiece without having to move the cut-off wheel.



\*Optional



# UNMATCHED USER-FRIENDLINESS

## Intelligent Time-Saving Features and Accessories

Like all of Struers' materialographic products, Discotom is designed to be easy- to-use with many time-saving controls, features and accessories. It is straightforward to set the parameters for cutting processes using the proven Turn/ Push knob, and the icon-based colour display gives you all the information you need in one view.

Discotom-100 helps to ensure the correct cut-off wheel speed - automatically. Enable the intelligent speed adjustment, select the hardness of the material you want to cut and the machine automatically sets the correct speed. The same wheel can be used for different materials saving time exchanging wheels.

The automatic x-table (available as accessory) increases the already high flexibility of Discotom even more. It allows for 4 Multi-Cut functions so you can cut slices of the same or varying thickness, or cut precisely in specified positions.

As with all of Struers' products, safety comes first. Discotom requires two-hand safety operation of the cutting table when the hood is opened. As soon as the hood is closed, the joystick alone can be used to operate the cutting table.

Discotom provides a unique horizontal LED light bar that illuminates the entire cutting chamber both when opened and closed.





# Spacious, versatile



Horizontal LED light bar

Large cutting chamber



Automatic and manual cleaning

Very large cutting table



Automatic x-table\*

Cooling System 4\*



Two-hand safety operation  
with open hood



# and easy-to-use




Ø 300 mm / 12"  
Ø 250 mm / 10"  
cut-off wheels

Easy-to-use  
control panel

No rust  
aluminum base



Emergency stop

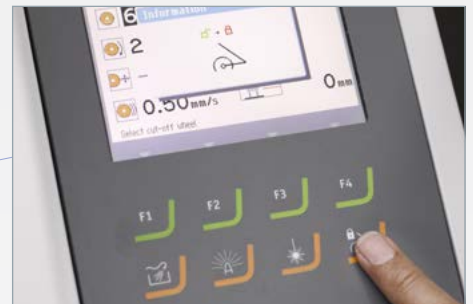

Motorized locking brake




Line laser\*




Table unit\*

\*Optional

## TECHNICAL DATA - Discotom-100/-10

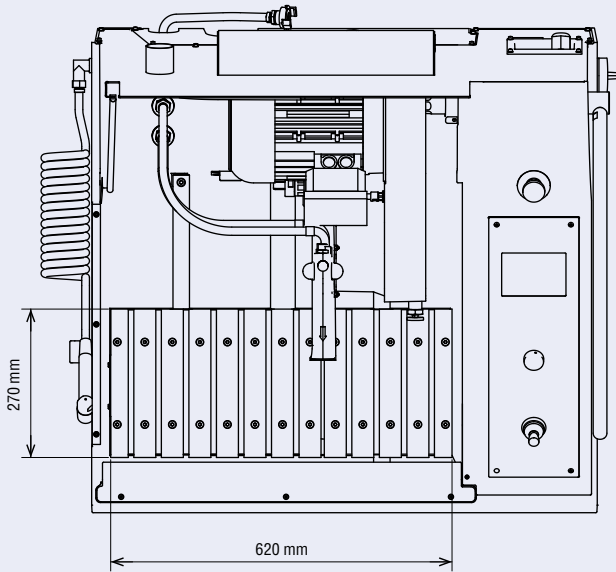

## CUTTING CAPACITY

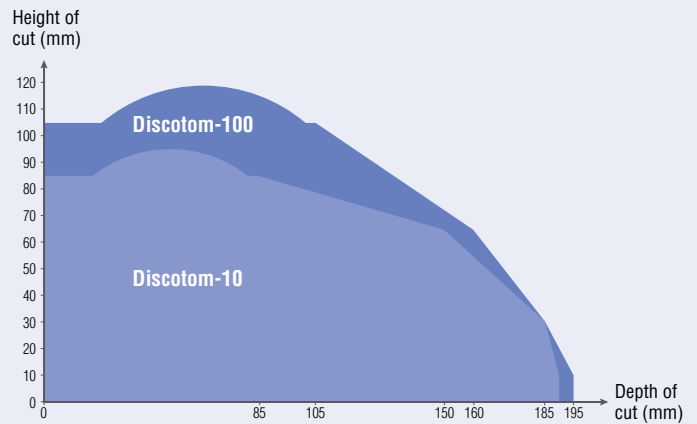

### Subject

### Specification

#### Metric / Imperial

#### Cutting capacity (max)

Discotom-100 (ø 300 mm/12" cut-off wheels)

ø 119 mm / 4.68" with 61 mm / 2.4" flange

Discotom-10 (ø 250 mm/10" cut-off wheels)

ø 94 mm / 3.70" with 61 mm / 2.4" flange

### PHYSICAL SPECIFICATIONS

Cutting motor	Nominal load (S1)	Intermittent (S3)
Discotom-100 / 50-60 Hz	4 kW / 5.4 HP	4.7 kW / 6.4 HP
Discotom-10 / 50 Hz	2.5 kW / 3.4 HP	3.2 kW / 4.3 HP
Discotom-10 / 60 Hz	3 kW / 4 HP	3.8 kW / 5.1 HP
<b>Cut-off wheel for Discotom-100</b>	Diameter x Thickness x Centre-hole Variable speed	300 x 2.0 x 32 mm / 12 x 0.08 x 1.26" 1500 - 3000 rpm
<b>Cut-off wheel for Discotom-10</b>	Diameter x Thickness x Centre-hole Fixed speed	250 x 1.5 x 32 mm / 10 x 0.06 x 1.26" 2850 rpm
<b>Positioning &amp; Feed</b>	Positioning range (of cut-off wheel) Max. height of sample underneath cut-off wheel  Max. positioning speed Feed Speed range (adjustable in steps of)	Z= 165 mm 80 mm @ 300 mm wheel 105 mm @ 250 mm wheel Y= 20 mm/s / 0.8"/s, X= 10 mm/s / 0.4"/s 0.05 - 2.5 mm/s / 2 - 100 mils/s (0.05 mm/s / 2 mils/s)
<b>Cutting table</b>		
Fixed cutting table	Width x Depth y-table range	620x270 mm / 24.4 x 10.6" 200 mm / 7.9"
x-table (option)	Width x Depth x-table range	282x270 mm / 11.1 x 10.6" 100 mm / 3.9"
T-slots		10 mm / 0.39"
<b>Dimensions and weight</b>	Width Depth Height Weight	920 mm / 36" 890 mm / 35" 685 mm / 27" 200 kg / 440 lbs



## SPECIFICATIONS

### Discotom-100 with fixed table

Automatic cut-off machine with variable spindle speed and variable automatic feed. 4.0 kW motor.

For 300 mm (12") cut-off wheels. Cutting table with 10 mm T-slots. Recirculation cooling unit (05766xxx) and clamping tools are ordered separately. Optional table unit (06266101) can be used.

Cat. no:	Voltage
06156129	3 x 220-240 V / 50-60 Hz
06156146	3 x 380-480 V / 50-60 Hz

### Discotom-100 with automatic x-table

Automatic cut-off machine with automatic x-table, variable spindle speed and variable automatic feed. 4.0 kW motor. For 300 mm (12") cut-off wheels. Cutting table with 10 mm T-slots. Recirculation cooling unit (05766xxx) and clamping tools are ordered separately. Optional table unit (06266101) can be used.

Cat. no:	Voltage
06156229	3 x 220-240 V / 50-60 Hz
06156246	3 x 380-480 V / 50-60 Hz

### Discotom-10 with fixed table

Automatic cut-off machine with fixed spindle speed (2.850 rpm) and variable automatic feed. 2.2 kW motor. For 250 mm (10") cut-off wheels. Cutting table with 10 mm T-slots. Recirculation cooling unit (05766xxx) and clamping tools are ordered separately. Optional table unit (06266101) can be used.

Cat. no:	Voltage
06256129	3 x 200 V / 50 Hz
06256130	3 x 200-210 V / 60 Hz
06256135	3 x 220-230 V / 50 Hz
06256136	3 x 220-240 V / 60 Hz
06256146	3 x 380-400 V / 50 Hz
06256147	3 x 380-415 V / 60 Hz
06256154	3 x 460-480 V / 60 Hz

### Discotom-10 with automatic x-table

Automatic cut-off machine with automatic x-table, fixed spindle speed (2.850 rpm) and variable automatic feed. 2.2 kW motor. For 250 mm (10") cut-off wheels. Cutting table with 10 mm T-slots. Recirculation cooling unit (05766xxx) and clamping tools are ordered separately. Optional table unit (06266101) can be used.

Cat. no:	Voltage
06256229	3 x 200 V / 50 Hz
06256230	3 x 200-210 V / 60 Hz
06256235	3 x 220-230 V / 50 Hz
06256236	3 x 220-240 V / 60 Hz
06256246	3 x 380-400 V / 50 Hz
06256247	3 x 380-415 V / 60 Hz
06256254	3 x 460-480 V / 60 Hz

## ACCESSORIES

### Line laser

Laser alignment aid. Visualizes cutting line. Cat. no: 06156912

### Replacement stainless steel bands

For Discotom-100 / -10 cutting table. 270 x 40 mm. Set of 2. Cat. no: R6150200

### Quick clamping tool with short stroke for 10 mm T-slots, left

For securing regular workpieces on left side of cut-off wheel. Complete with backstop and spanner. Jaw movement: 12 mm. Max. round workpiece height: 50 mm. Cat. no: 05876935

### Table unit for Discotom

With compartment for recirculation cooling unit, drawer for tools and shelves for cut-off wheels. Width: 930 mm, depth: 950 mm, height: 800 mm. Cat. no: 06266101


### Extension for table unit

Can be mounted on both right and left hand side. Width: 400 mm, depth 950 mm. Cat. no: 06266901

### Cooling System 4


With 100 l tank, large pump, Cooli-1, filter bag and adapter plate, consists of: 05766905, 057660xx, 05761116, 05766928, 05766927

Cat. no:	Voltage
05766716	1 x 100 V / 50 Hz
05766723	1 x 100-120 V / 60 Hz
05766722	1 x 220-240 V / 50Hz
05766724	1 x 220-240 V / 60 Hz



*Struers' equipment is in conformity with the provisions of the applicable International Directives and their appurtenant Standards. (Please contact your local supplier for details)*

*Struers' products are subject to constant product development. Therefore, we reserve the right to introduce changes in our products without notice.*

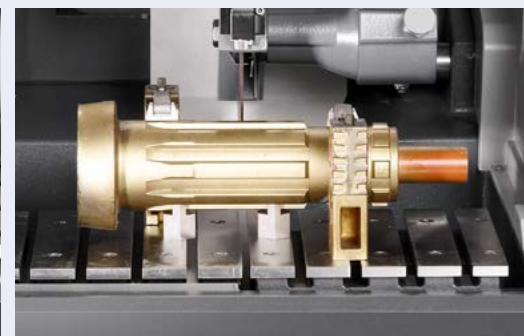

# FLEXIBLE CLAMPING

**Struers A/S**  
Pederstrupvej 84  
DK-2750 Ballerup, Denmark  
Phone +45 44 600 800  
Fax +45 44 600 801  
struers@struers.dk  
www.struers.com



**AUSTRALIA & NEW ZEALAND**

**Struers Australia**  
27 Mayneview Street  
Milton QLD 4064  
Australia  
Phone +61 7 3512 9600  
Fax +61 7 3369 8200  
info.au@struers.dk

**BELGIQUE (Wallonie)**

**Struers S.A.S.**  
370, rue du Marché Rollay  
F- 94507 Champigny  
sur Marne Cedex  
Téléphone +33 1 5509 1430  
Télécopie +33 1 5509 1449  
struers@struers.fr

**BELGIUM (Flanders)**

**Struers GmbH Nederland**  
Elektraweg 5  
3144 CB Maassluis  
Telefoon +31 (10) 599 7209  
Fax +31 (10) 5997201  
netherlands@struers.de

**CANADA**

**Struers Ltd.**  
7275 West Credit Avenue  
Mississauga, Ontario L5N 5M9  
Phone +1 905-814-8855  
Fax +1 905-814-1440  
info@struers.com

**CHINA**

**Struers Ltd.**  
No. 1696 Zhang Heng Road  
Zhang Jiang Hi-Tech Park  
Shanghai 201203, P.R. China  
Phone +86 (21) 6035 3900  
Fax +86 (21) 6035 3999  
struers@struers.cn

**CZECH REPUBLIC**

**Struers GmbH**  
Organizační složka  
Havlíčkova 361  
CZ-252 63 Roztoky u Prahy  
Phone +420 233 312 625  
Fax +420 233 312 640  
czechrepublic@struers.de

**DEUTSCHLAND**

**Struers GmbH**  
Carl-Friedrich-Benz-Straße 5  
D-47877 Willich  
Telefon +49 (0) 2154 486-0  
Fax +49 (0) 2154 486-222  
verkauf@struers.de

**FRANCE**

**Struers S.A.S.**  
370, rue du Marché Rollay  
F-94507 Champigny  
sur Marne Cedex  
Téléphone +33 1 5509 1430  
Télécopie +33 1 5509 1449  
struers@struers.fr

**HUNGARY**

**Struers GmbH**  
Magyarországi Fióktelep  
Tatai ut 53  
2821 Gyermely  
Phone +36 (34) 880546  
Fax +36 (34) 880547  
hungary@struers.de

**IRELAND**

**Struers Ltd.**  
Unit 11 Evolution @ AMP  
Whittle Way, Catcliffe  
Rotherham S60 5BL  
Tel. +44 0845 604 6664  
Fax +44 0845 604 6651  
info@struers.co.uk

**ITALY**

**Struers Italia**  
Via Monte Grappa 80/4  
20020 Arese (MI)  
Tel. +39-02/38236281  
Fax +39-02/38236274  
struers.it@struers.it

**JAPAN**

**Marumoto Struers K.K.**  
Takara 3rd Building  
18-6, Higashi Ueno 1-chome  
Taito-ku, Tokyo 110-0015  
Phone +81 3 5688 2914  
Fax +81 3 5688 2927  
struers@struers.co.jp

**NETHERLANDS**

**Struers GmbH Nederland**  
Elektraweg 5  
3144 CB Maassluis  
Telefoon +31 (10) 599 7209  
Fax +31 (10) 5997201  
netherlands@struers.de

**ÖSTERREICH**

**Struers GmbH**  
Zweigniederlassung Österreich  
Betriebsgebiet Puch Nord 8  
5412 Puch  
Telefon +43 6245 70567  
Fax +43 6245 70567-78  
austria@struers.de

**POLAND**

**Struers Sp. z o.o.**  
Oddział w Polsce  
ul. Jasnogórska 44  
31-358 Kraków  
Phone +48 12 661 20 60  
Fax +48 12 626 01 46  
poland@struers.de

**ROMANIA**

**Struers GmbH**  
Sucursala Sibiu  
Str.Scoala de Inot, nr. 18  
RO-550005 Sibiu  
Phone +40 269 244 558  
Fax +40 269 244 559  
romania@struers.de

**SCHWEIZ**

**Struers GmbH**  
Zweigniederlassung Schweiz  
Weissenbrunnenstraße 41  
CH-8903 Birmensdorf  
Telefon +41 44 777 63 07  
Fax +41 44 777 63 09  
switzerland@struers.de

**SINGAPORE**

**Struers Singapore**  
627A Aljunied Road,  
#07-08 BizTech Centre  
Singapore 389842  
Phone +65 6299 2268  
Fax +65 6299 2661  
struers.sg@struers.dk

**SUOMI**

**Struers Suomi**  
Kalevankatu 43  
00180 Helsinki  
Puhelin +358 (0)207 919 430  
Faksi +358 (0)207 919 431  
finland@struers.fi

**SWEDEN**

**Struers Sverige**  
Ekbacksvägen 22  
168 69 Bromma  
Telefon +46 (0)8 447 53 90  
Telefax +46 (0)8 447 53 99  
info@struers.se

**UNITED KINGDOM**

**Struers Ltd.**  
Unit 11 Evolution @ AMP  
Whittle Way, Catcliffe  
Rotherham S60 5BL  
Tel. +44 0845 604 6664  
Fax +44 0845 604 6651  
info@struers.co.uk

**USA**

**Struers Inc.**  
24766 Detroit Road  
Westlake, OH 44145-1598  
Phone +1 440 871 0071  
Fax +1 440 871 8188  
info@struers.com

**About Struers**

*Struers is the world leader in materialographic innovation. We develop, manufacture and distribute quality materialographic preparation solutions to help our customers realize maximum productivity and performance in laboratories and production facilities around the world. Struers is based in Copenhagen, Denmark with affiliates in 19 countries. Struers' employees, including experienced metallographers and qualified service personnel, work from strategically positioned global offices, supported by a worldwide network of dealers.*

**Learn more**

Contact a Struers sales representative today or visit [www.discotom-100.com](http://www.discotom-100.com)